



## Data Sheet 1471472

**Product:** Dimmer RS16/600GLE/I  
**El-number:** 1471472  
**Mat.no:** EKO03975  
**EAN:** 7020160397515  
**Packing:** 1  
**Color:** Polarwhite



**Product description:** 600 GLE/I dimmer RS16 design for ohmic, 230V halogen, electronic or iron core trafo. On/Off by pushing the button, dim by turning knob  
The dimmer can be remote operated by a two way switch (6).

600GLE/I can be surface mounted in a combination with a surface box 33mm deep. If the dimmer is installed in a combinationframe with several holes, the supplied frame must be removed.  
If ELKO Plus design is wanted, use a ELKO Plus servicepack. Ordered separately.

Possibility to use a lightmodule for light around the dimmerknob in ELKO Plus version, delivered as accessory.

---

**Technical specifications:** Voltage: 230 V/50 Hz.  
Load:  
-Ohmic: 20-6000W  
-230V Halogen: 20-550W  
-Electronic trafo: 20-600VA  
-Ironcore trafo: 20-600VA  
Fuse: Electronic, Short circuit and temperature fuse  
The dimmer will cutout in case of overload. The overload must be removed before the dimmer will function again.  
Surface mounted box: 33mm  
Operate:  
-On/off: Push.  
-Dim: Turn knob  
Color: Polarwhite  
Dimmer type: Trailing edge  
Soft start  
IP20  
Depth in box: 29mm


### ELKO AS

E-mail: elko@elko.no  
Internet: www.elko.no  
Bank: 6219.05.15880  
Org.no.: NO 911 382 563 MVA


ELKO Front office  
Sandstuveien 68, NO-0680 Oslo  
P.O.Box 6598 Etterstad, NO-0607 Oslo  
Tel.: +47 67 80 73 00  
Fax: +47 67 80 73 01

ELKO Plant  
Sporvind Industriområde, NO-3340 Åmot  
Tel.: +47 32 78 91 00  
Fax: +47 32 78 91 01

## Size

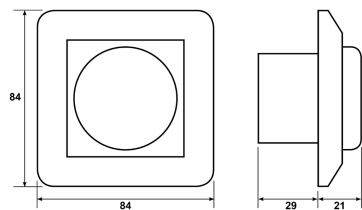

## Wiring diagram



## ELKO AS

E-mail: [elko@elko.no](mailto:elko@elko.no)  
Internet: [www.elko.no](http://www.elko.no)  
Bank: 6219.05.15880  
Org.no.: NO 911 382 563 MVA

ELKO Front office  
Sandstuveien 68, NO-0680 Oslo  
P.O.Box 6598 Etterstad, NO-0607 Oslo  
Tel.: +47 67 80 73 00  
Fax: +47 67 80 73 01

ELKO Plant  
Sporpind Industriområde, NO-3340 Åmot  
Tel.: +47 32 78 91 00  
Fax: +47 32 78 91 01