



Data Sheet 1410259

Product: Plus timer T10V PH
EI-number: 1410259
Mat.no: EKO04644
EAN: 7020160464415
Packing: 1
Color: Polarwhite



Product description: The timer T10 V is installed in a traditional flush-mounted box. The timer is equipped with a push button switch, a LED-indicator and a rotary selector switch. Relay outputs are potential free.

When you plug in the line-voltage the timer will go to OFF-state and the relay connects the terminals C and NC.
When you push the button once the timer goes to On-state (the red light lights) and the relay connects the terminal C and NO.
You may select the ON-state time the table above. At any time you can change the operation from ON-state to OFF-state (and vice versa) by pushing the button.
Note !
Before changing the operation time, make sure that the timer is in OFF-state.

Technical specifications: Flush mounted timer switch.
230V/50Hz
Max load: 2000W
Time adjustment: 1h, 2h, 4h, 8h.
Relay: Potential free - insulated from the line voltage.
Load: 10A/230V - 10A/24V DC .
Switch: 1 Pole.
Fuse: None.
Timing: 15min - 8 hours.
Powerusage: App. 20 mA.
Set the time: Under coverplate.
IP21
Color: Polarwhite


ELKO AS

E-mail: elko@elko.no
Internet: www.elko.no
Bank: 6219.05.15880
Org.no.: NO 911 382 563 MVA


ELKO Front office
Sandstuveien 68, NO-0680 Oslo
P.O.Box 6598 Etterstad, NO-0607 Oslo
Tel.: +47 67 80 73 00
Fax: +47 67 80 73 01

ELKO Plant
Sporvind Industriområde, NO-3340 Åmot
Tel.: +47 32 78 91 00
Fax: +47 32 78 91 01

Size



Wiring diagram

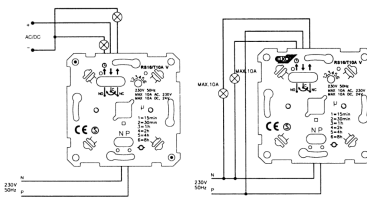

ELKO AS

E-mail: elko@elko.no
Internet: www.elko.no
Bank: 6219.05.15880
Org.no.: NO 911 382 563 MVA

ELKO Front office
Sandstuveien 68, NO-0680 Oslo
P.O.Box 6598 Etterstad, NO-0607 Oslo
Tel.: +47 67 80 73 00
Fax: +47 67 80 73 01

ELKO Plant
Sporpind Industriområde, NO-3340 Åmot
Tel.: +47 32 78 91 00
Fax: +47 32 78 91 01