



Data Sheet 1410675

Product: Plus dimmer DALI PW
EI-number: 1410675
Mat.no: EKO05830
EAN: 7020160583017
Packing: 1
Color:



Product description:


DALI dimmer for DALI electronic ballasts. On DALI lights with DALI device DT8, it is possible to adjust the light color.
Active operation: When the main voltage is connected, the dimmer supplies the control current for max. 26 DALI participants.
Passive operation: When the mains voltage is not connected, the dimmer supplies power from the DALI voltage and acts as an additional control station.
Parallel switching of max 4 active dimmers to supply max 104 DALI participants possible.

The dimmer is mounted in flush mounted boxes, and is compatible with ELKO RS16 and ELKO Plus combination frames. If surface mounted is wanted, use the deep surface housing.


Technical specifications:

Dimmertype: DALI
Nominal voltage: AC 230V / 50-60 Hz
Power consumption: Max. 2W
DALI nominal output: DC 16V (typical)
DALI output current: Max. 52mA
Color temperature adjustment rang (DT8): 2000-10000K
Connecting terminals: Screw terminals for max 4mm²
Number of DALI Participants: 26
Ambient temperature: -5 to +45 degrees C
Surface housing: 33mm
Depth in box: 32mm

Size

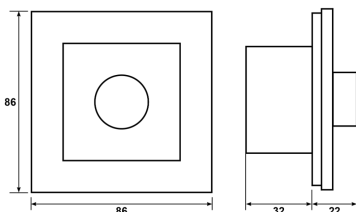

Wiring diagram

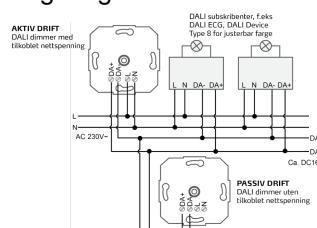

ELKO AS

E-mail: elko@elko.no
Internet: www.elko.no
Bank: 6219.05.15880
Org.no.: NO 911 382 563 MVA

ELKO Front office
Sandstuveien 68, NO-0680 Oslo
P.O.Box 6598 Etterstad, NO-0607 Oslo
Tel.: +47 67 80 73 00
Fax: +47 67 80 73 01

ELKO Plant
Sporpind Industriområde, NO-3340 Åmot
Tel.: +47 32 78 91 00
Fax: +47 32 78 91 01